

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)


PCT

(10) International Publication Number
WO 2005/014414 A1

- (51) International Patent Classification⁷: **B65D 41/34**
- (21) International Application Number:
PCT/EP2003/014250
- (22) International Filing Date:
15 December 2003 (15.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
MO2003A000232 7 August 2003 (07.08.2003) IT
- (71) Applicant (for all designated States except US): **SACMI - COOPERATIVA MECCANICI IMOLA - SOC. COOP. A.R.L.** [IT/IT]; Via Selice Provinciale, 17/A, I-40026 Imola (IT).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **FALZONI, Alessandro** [IT/IT]; Via Cogne, 6/N, I-40026 Imola (IT). **PUCCI, Fabrizio** [IT/IT]; Via 2 Agosto 1980, 8, I-40023 Castel Guelfo di Bologna (IT).
- (74) Agent: **LUPPI, Luigi**; Luppi & Associati S.r.l., via Borromei, 1/A, I-20123 Milano (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: CAP MEANS

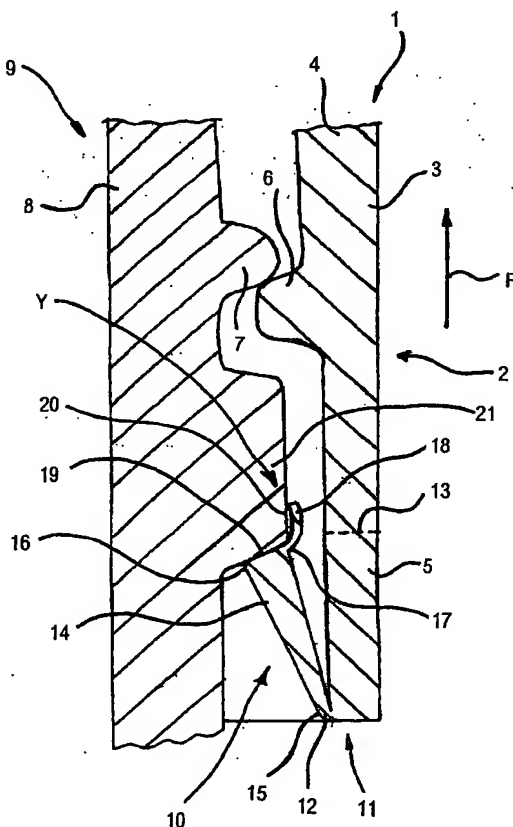

(57) Abstract: Cap means comprises opening-indicator means (5) that has an outer edge (11) wherefrom leads away fin means (10) which in use extends towards the inside of said cap means (1), said fin means (10) comprising, in one of its portions nearest said edge (11), an elongated element (14) having a substantially rectilinear extension, said fin means (10) further comprising, in one of its portions further away from said edge (11), a flexible appendage means (18); cap means comprises opening indicator means (5) that has an outer edge (11) wherefrom leads away fin means (10) comprising a first portion (26) suitable for interacting with a surface (25) of first collar means (22) extending radially from a neck (8) of container means (9), a second portion (33) suitable for interacting with a further surface (27) of second collar means (23) extending radially from said neck (8) and a third portion (39) suitable for interacting with a yet further surface (40) of said first collar means (23).



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY,

KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.